



# DATA ENTRY


## Screw features




☐ Flat Countersunk




☐ Cylindrical



☐ Hexagonal



☐ Oval countersunk



☐ Oval cylindrical




- ☐ 1
- ☐ 2
- ☐ 3

☐ Phillips




- ☐ 1
- ☐ 2
- ☐ 3

☐ Pozidrive



☐ Slotted




- ☐ 2
- ☐ 2,5
- ☐ 3
- ☐ 4
- ☐ 5

☐ Hex Socket Screw



- ☐ T8
- ☐ T9
- ☐ T10
- ☐ T15
- ☐ T20
- ☐ T25


☐ Torx




- ☐ 7
- ☐ 8
- ☐ 10

☐ Hexagonal

### ☐ STANDARD SCREW

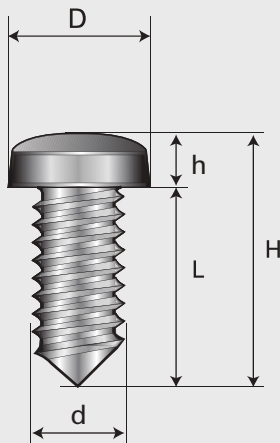

### ☐ KNURLED WASHER UNDER THE HEAD

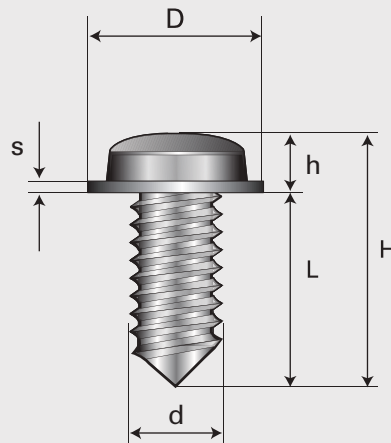

☐ Rotating knurled

### OBLIGATORY DATA:

D = \_\_\_\_\_ mm

H = \_\_\_\_\_ mm

L = \_\_\_\_\_ mm

d = \_\_\_\_\_ mm

h = \_\_\_\_\_ mm

s = \_\_\_\_\_ mm

☐ Screw attached

☐ Screw drawing attached

☐ Enclose samples to be assembled

## Tightening type

Torque: \_\_\_\_\_ Nm

Accuracy: \_\_\_\_\_ %

Speed: \_\_\_\_\_ Rpm

### Cycle

Autonomy \_\_\_\_\_ Nr. screws

Cycle time (tightening time – 1 screw)


\_\_\_\_\_

Q.ty of pieces/hour \_\_\_\_\_


Q.ty of screws/components \_\_\_\_\_

## Features of the tightening point


☐ Plane surface without obstruct



☐ Near to wall



☐ Embedded



Dimensions (mm)

a = \_\_\_\_\_

b = \_\_\_\_\_

c = \_\_\_\_\_

d = \_\_\_\_\_

e = \_\_\_\_\_

### Materials:

☐ Wood ☐ Plastic ☐ Aluminium ☐ Steel ☐ Iron ☐ Other \_\_\_\_\_

## Tightening system

☐ Pneumatic


☐ Electric

☐ Electronic


☐ Semiautomatic with operator




☐ Automatic: to be installed on an assembly line



### Type of tightening

☐ Horizontal 

☐ From bottom towards the top 

☐ From the top towards the bottom 

☐ Other: \_\_\_\_\_ degrees

### Ergonomic auxiliaries

☐ Balancer  
☐ Support arm  
☐ Auxiliary grip

### Slide movement

☐ Single  
☐ Dual with approaching  
☐ Tightening in depth (not torque-controlled)

## Other details

Particular solution in order to not damage the piece:

no ☐ yes ☐ \_\_\_\_\_

Power features:

230V, 50Hz ☐ other ☐ \_\_\_\_\_

Length of the screw feed hose (5 mt. supplied as a standard): other lenght

no ☐ yes ☐ \_\_\_\_\_ mt.

Poka Yoke device:

no ☐ yes ☐ \_\_\_\_\_